

## Series 2, Canopy cooker hood, 53 cm, Anthracite DLN53AA70B



**D**

DWZ0IN0A0 Standard odor filter (replacement)  
DWZ0IN0T0 Standard recirculation kit

**Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.**

- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **High extraction rate - for continuously clean air in the kitchen.**
- **3-speed power Level options to suit your cooking style and recipes.**

Typology: ..... Built-in/Built-under  
Length electrical supply cord: ..... 150.0 cm  
Min. required niche size for installation (HxWxD): 208mm x 493.0mm x 257mm mm  
Minimum distance above an electric hob: ..... 500 mm  
Minimum distance above a gas hob: ..... 650 mm  
Net weight: ..... 4.5 kg  
Type of control: ..... mechanical  
Number of speed settings: ..... 3  
Max. air extraction: ..... 302 m<sup>3</sup>/h  
Max. air recirculation: ..... 300 m<sup>3</sup>/h  
Maximum Air flow: ..... 302 m<sup>3</sup>/h  
Number of lights: ..... 2  
Noise level: ..... 62 dB(A) re 1pW  
Diameter of air outlet: ..... 120 mm  
Grease filter material: ..... Washable aluminium  
EAN code: ..... 4242005095391  
Connection rating: ..... 121 W  
Fuse protection: ..... 5 A  
Voltage: ..... 220-240 V  
Frequency: ..... 50 Hz  
Plug type: ..... GB plug  
Installation typology: ..... Built-in



4 242005 095391

## **Series 2, Canopy cooker hood, 53 cm, Anthracite DLN53AA70B**

**Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.**

---

### **Key performance features:**

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 302 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 62 dB dB\*

### **Features**

- Slider switch control for extractor speeds and light
- 3 power levels
- Single motor
- 2 x 3W LED
- Colour Temperature: 2700 K
- 1 removable metal grease filter cassette
- Installation: integrated

### **Design**

- Canopy hood
- Slider switch control
- Mechanical

### **Performance/technical information**

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit (accessory) needed
- Extraction rate according to EN 61591: max. 302 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 62 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)
- Power rating: 121 W
- Light Intensity: 78 lux
- Electrical cable length 1.5 m
- Diameter pipe Ø 120 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 208-208 x 534 x 300 mm
- Dimensions recirculating (HxWxD): 208-208 x 534 x 300 mm
- Built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Blower Efficiency Class: E\*
- Lighting Efficiency Class: D\*
- Grease Filtering Efficiency Class: D\*
- Average Energy Consumption: 67.7 kWh/year\*


### **Optional accessories**

- Recirculating kit DWZ0IN0A0

\* In accordance with the EU-Regulation No 65/2014



**Series 2, Canopy cooker hood, 53  
cm, Anthracite  
DLN53AA70B**

Measurements in mm

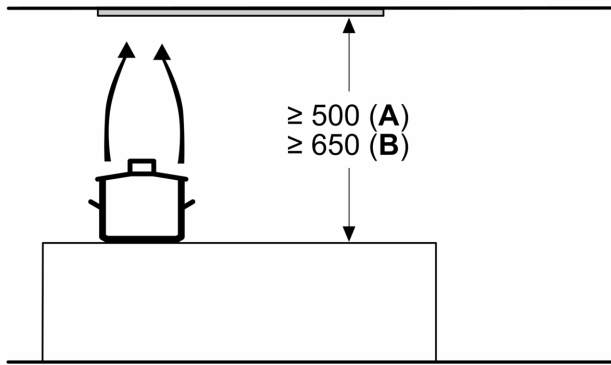


From upper edge of pan support


**A:** Electric  
**B:** Gas

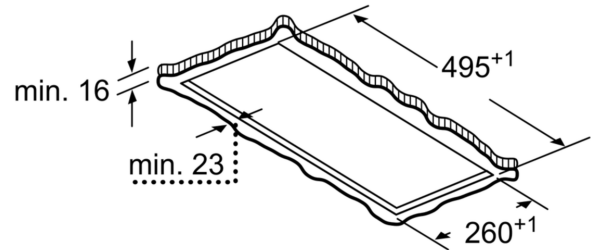

measurements in mm

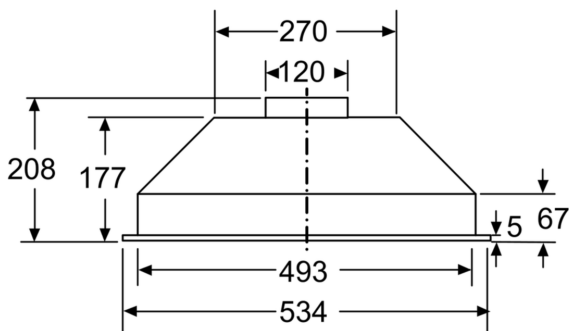

measurements in mm

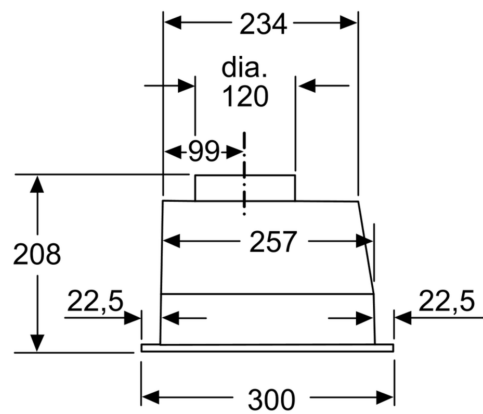

measurements in mm

