


De Dietrich

Dishwasher

Ref.: DCJ632DQB

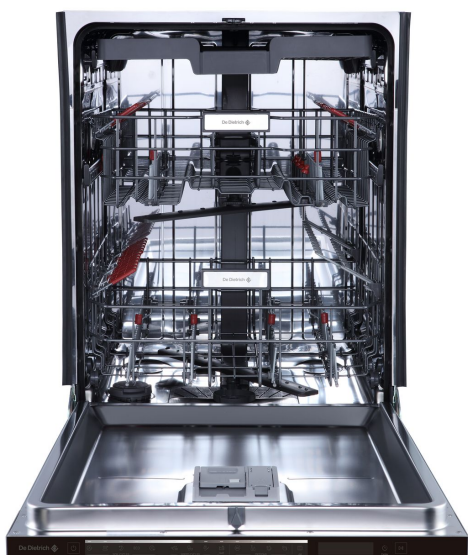

Product highlights

16 sets With its new expanded tub, your dishwasher can contain 16 sets including plates up to 33cm large.

Clean Jet System A new nozzle system integrated into the upper basket spraying water directly to the bottom of glasses and wine decanters, delivering bright shining results.

ICS+ Intelligent Control System: thanks to sensors, this program adapts throughout the cycle all the parameters of wash (duration, water, temperature) according to the quantity of dishes and its level of dirtiness. The result is then always perfect.

GENERAL

Brand	DE DIETRICH
Commercial code	DCJ632DQB
EAN code	3660767995550
Customs code	84221100

FEATURES

Construction type	Built-in
Quantity of cutlery	16
Type of engine	Induction
Tub material	Stainless steel
Drying system	Natural conv.with auto door opening
3 in 1 function	Yes
Body colour	
Door colour	Door covering not provided
Panel colour	Stainless steel
Interior light	Yes
Connectivity	No

PERFORMANCE

Energy efficiency class	B
Annual energy consumption x100 cycles (kW/h)	66
Duration of program (min)	215
Water consumption (L/cycle)	9,3
Noise level (dB (A))	42
Class of environmental noise emissions	B

PROGRAMMING

Electronic type	Digits
Type of buttons	Touch-sensitive
Keyboard locking	No
Delayed start (hr)	24
Remaining time display (hr)	Yes
End of cycle indicator	Spotlight + buzzer
Number of programmes	9
Programmes	ICS+;Hygiene Plus;Night silence;Eco;90 min;Prewash;Tank cleaning;Wash & Dry 55 Min;Rapid 35 min
Options	Half load;Express;Drying Plus;Clean Jet System
Number of washing temperatures	6
Temperatures (°C)	55;50;60;65;70;72
Salt light indicator	Yes
Rinse aid light indicator	Yes

De Dietrich

Dishwasher

Ref.: DCJ632DQB

INTERIOR EQUIPMENT	
Upright adjustable upper basket	Yes
Type of lower basket	Modular
3rd basket	Yes
Cutlery basket	No
Equipment for upper basket	4 holders for stemmed glasses + cups
Maximum size of plate in lower basket (mm)	330
Maximum size of plate in upper basket (mm)	250

SAFETY	
Hydraulic safety	Overflow+antileakage+Aquablock

INSTALLATION	
Dimensions of the unboxed product HxWxD (mm)	857X598X550
Dimensions of the packed product HxWxD (mm)	890X670X665
Gross weight (kg)	42.3
Net weight (kg)	38.8
Removable top	No
Height without the top (mm)	
Adjustable feet	Yes
Back feet adjustable from the front	Yes
Built-in dimensions HxWxD (mm)	860X600X580
Installation at height possible	Yes
Door assembly	Sliding door
Maximum weight supported by the front panel of the unit (kg)	9
Maximum power (W)	1930
Voltage (V)	230
Frequency (Hz)	50
Fuse (A)	10
Plug type	Europe
Hot water and cold water connection	

MANUFACTURING	
Country of origin	China
Availability of spare parts (years)	15
Repair Index	
Registration No.	1862604
URL EPREL	https://eprel.ec.europa.eu/qr/1862604