HV643D60UK

Hisense

D Energy Class

Auto Dry

Three Level Wash

1h Progamme

Glassware Programme

Flexible Baskets

Automatic Programme

Super Silent Operation



Flexible Third Basket

Aqua Protect System

Eco Programme

15 min Fast Cleaning

Touch Control

D Energy Class

Hot Water Connection

Intuitive Control

Aqua Protect System

General information

Product group:	**Dishwasher**	Energy efficiency class:	**D**
Noise class:	**B**	Basket helper colour:	**Light grey**
Spray arm material:	**Plastic**		

Efficiency

Cleaning performance:	**A**	Drying performance:	**A**
Drive:	**Asynchronous motor**	Water consumption per cycle for the Eco program:	**11 L**
Max. temperature of inflow water:	**70 °C**	Energy consumption per cycle for the Eco program 40-60° C :	**0.85 kWh**
Energy consumption per 100 cycles:	**85 kWh**	Consumption in standby mode:	**0.49 W**
Start delay (W):	**3.99**		

Control

Possible to control via Wi-Fi:	**No**	Control:	**Touch Control**
Wash end indicator:	**Light - sound signal**	Start delay:	**0-24 hours**
Function 3 in 1:	**Yes**		

Programmes

Dishwashing programs:	**Short Programme, Crystal glasses, Programme Hygiene, Eco Programme, Automatic Programme, Intensive Programme**	Personalisation of Programmes:	**Memory Programme**
Main wash temperature (°C):	**40/45/50/55/60/65/70**	Duration of Eco programme:	**175 min**

Features

Number of place settings:	**16 pcs**	Upper basket system:	**Click-Clack system**
Sliding door:	**No**	Interior light:	**No**
Status Light:	**No**	Additional possibilities:	**Fast Cleaning, Auto Dry Automatic door opening, Selfcleaning programme**
Ioniser:	**No**	Sensors:	**Water level sensor, Clear water sensor**
Auto Dosing:	**No**		

Equipment

Number of baskets:	**3**	Upper basket:	**Wide mesh base, Foldable left CupHolder, Foldable right CupHolder, Foldable/dividable left CupHolder, Fixed pin rows, Fixed glass support, Wide knife stand, 3 cup holders**
Lower basket:	**Wide mesh base, Foldable/dividable rear pin row**	Top tray:	**No logotype, Removable, Plastic handle, Handle, With telescopic rails, Dividable and removable**

Safety

Anti Flood Protection:	**Anti Flood Protection**	Service diagnostic indicator:	**Yes**
Tub material:	**Stainless steel**		

Technical data

Noise level (max) dB(A):	**44**	Height setting:	**74 mm**
Width of the product:	**598 mm**	Height of the product:	**816 mm**
Depth of the product:	**555 mm**	Width of niche size for installation min.:	**600 mm**
Height of niche size for installation min.:	**820 mm**	Depth of niche size for installation min.:	**555 mm**
Width of the packed product:	**640 mm**	Height of the packed product:	**880 mm**
Depth of the packed product:	**665 mm**	Gross weight:	**34.5 kg**
Net weight:	**32.5 kg**	Voltage:	**220-240 V**
Product code:	**739830**	EAN code:	**3838782613395**
EPREL number:	**1163708**		

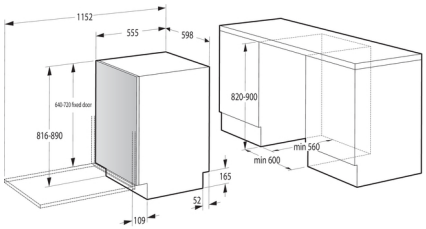

Fixed door length XL 640-720 (mm), Sliding door 680-760 (mm)

Niche height (mm)

Plinth height (mm)	820	830	840	850	860	870	880	890
60	760							
70	750	760						
80	740	750	760					
90	730	740	750	760				
100	720	730	740	750	760			
110	710	720	730	740	750	760		
120	700	710	720	730	740	750	760	
130	690	700	710	720	730	740	750	760
140	680	690	700	710	720	730	740	750
150	670	680	690	700	710	720	730	740
160	660	670	680	690	700	710	720	730
170	650	660	670	680	690	700	710	720
180	640	650	660	670	680	690	700	710
190		640	650	660	670	680	690	700
200			640	650	660	670	680	690
210				640	650	660	670	680
220					640	650	660	670
230						640	650	660
240							640	650
250								640

730 Sliding door
700 Sliding door or fixed door
670 Fixed door

Niche dimensions



Special installation



Special installation can be used with higher doors