


N 50, BUILT-UNDER FRIDGE, 82 X 60 CM, FLAT HINGE
KU1212FE0G



3 x egg tray

KFZ10AX0 Door panel with decor frame
KSGG0MZ0 Butter box
KU1213Z0 Attachment door, stainless steel

Built-under fridge: loads of space and easy access, with Door Alarm for worry-free storage where space is limited.

- ✓ Super Cooling – Reduces the temperature for quick chilling, before returning to the regular setting.
- ✓ Our safety glass shelves happily shoulder generous loads of delicacies in your fridge

Energy Efficiency Class:E
Average annual energy consumption in kilowatt hour per year (kWh/a): 93 kWh/a
Sum of volume of frozen compartments: 0 l
Sum of volume of chill compartments: 134 l
Airborne acoustical noise emissions : 35 dB(A) re 1pW
Airborne acoustical noise emission class: B
Built-in / Free-standing: Built-in
Door panel options: Not possible
Height: 820 mm
Width of the appliance: 598 mm
Depth: 548 mm
Min. required niche size for installation (HxWxD): .820 x 600 x 550 mm
Net weight: 28.5 kg
Fuse protection: 10 A
Door hinge: Right reversible
Voltage: 220-240 V
Frequency: 50 Hz
Length electrical supply cord: 230.0 cm
Number of compressors: 1
Number of independent cooling systems: 1
Interior ventilator: No
Reversible Door Hinge: Yes
Number of Adjustable Shelves in fridge compartment: 3
Shelves for Bottles: No
EAN code: 4242004272328
Brand: Neff
Product name / Commercial code: KU1212FE0G
Product category: Refrigerator
Frost free system: No
Installation typology: Built-under
Included accessories: 3 x egg tray



4 242004 272328

*N 50, BUILT-UNDER FRIDGE, 82 X 60 CM, FLAT
HINGE
KU1212FE0G*

Performance and Consumption

- EU19_EEK_D: E
- Total Volume : 134 l
- Annual Energy Consumption: 93 kWh/a
- Climate Class: SN-T
- Noise Level : 35 dB , EU19_Noise emission class_D: B

Functions

- LED with Soft Start

Design features

- Electronic control (LED chain)
- optical and acoustical
- Fresh mode
- Home Connect: Remote diagnostics, Remote Monitoring and Control
- Super Cooling: automatic deactivation
- Automatic defrost fridge
- Easy clean interior

Design features

- Net Fridge Volume : 134 l
- 2 door bins
- Bottle holder in x-deep door tray

Freshness System

Key features - Fridge section

- Right hinged door, reversible
- built under
- Ventilation through plinth
- Length of power cord: 230 cm
- 220 - 240 V

Dimension and installation

- Niche Dimensions: 82 cm H x 60 cm W x 55 cm D
- Dimensions: 82 cm H x 59.8 cm W x 54.8 cm D

Key features - Freezer section

- KU1212FE0G

Country Specific Options


- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

Additional features

N 50, BUILT-UNDER FRIDGE, 82 X 60 CM, FLAT
HINGE
KU1212FEOG

measurements in mm


Recommended gap dimensions for flat hinges




F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

Measurements in mm

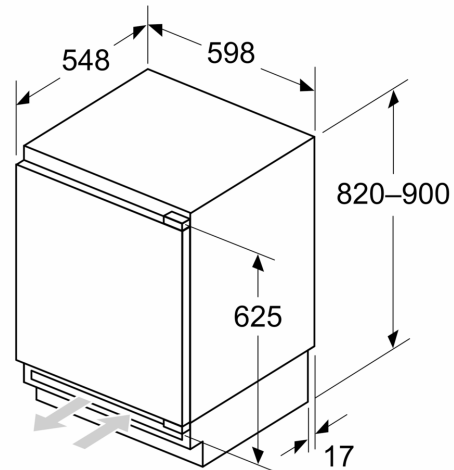

Measurements in mm




A: Substructure height

B: ≥ 560 mm (recommended)


Space for electrical connection next to the appliance on the left or right side

Measurements in mm

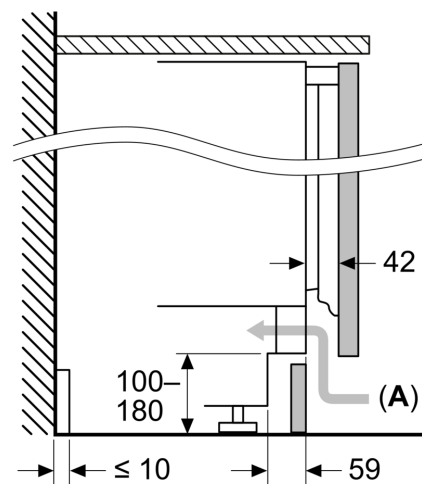

A: Air inlet ≥ 200 cm²

Maximal permissible weight of the unit fronts

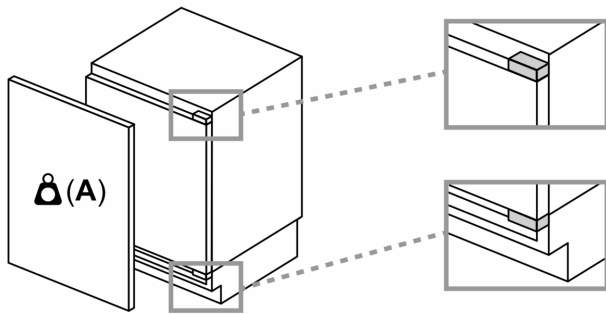

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

A: Weight ≤ 12 kg